


MAINTENANCE NOTES:

1. REMOVE SEDIMENT WHEN HALF HEIGHT OF STONE AND CLEAR HARDWARE OF DEBRIS TO PROVIDE ADEQUATE FLOW FOR SUBSEQUENT RAINS, TAKING CARE NOT TO DAMAGE OR UNDERCUT HARDWARE DURING SEDIMENT REMOVAL.
2. REPLACE STONE AS NEEDED.

GALVANIZED HARDWARE WIRE EXTENDS TO TOP OF BOX

STANDARD METAL POSTS 2'-0" IN GROUND

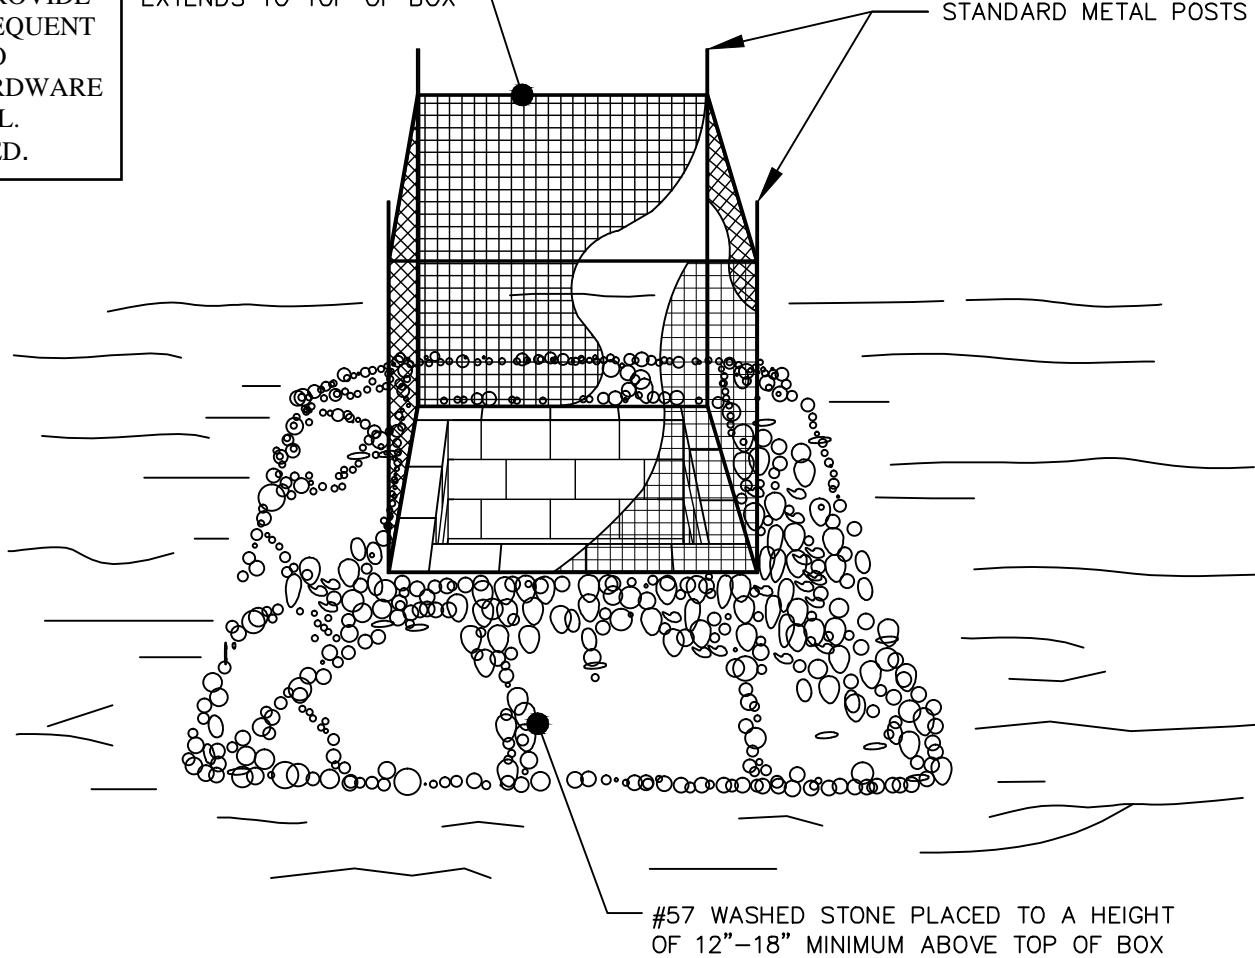

#57 WASHED STONE PLACED TO A HEIGHT OF 12"-18" MINIMUM ABOVE TOP OF BOX



## STANDARD CATCH BASIN/YARD INLET PROTECTION

DETAIL NUMBER

2018-001  
SHEET 1 of 1