


PLAN VIEW

ADDITIONAL NOTES:

- 1) INSPECT SILT BAG DAILY.
- 2) EFFORTS MUST BE MADE TO DEWATER BASIN OR OTHER WORK AREA FROM TOP OF WATER COLUMN TO MIMIC SURFACE DEWATERING OF SKIMMER IN A SKIMMER BASIN, WHICH DRAWS THE CLEANEST WATER FROM THE TOP OF PONDED WATER. OPENING OF INTAKE HOSE SHOULD NOT BE SET DIRECTLY IN SEDIMENT/MUD. VARIATIONS OF SUSPENDING INTAKE HOSE TO ACHIEVE THIS ARE ALLOWABLE.
- 3) SILT BAG MUST BE LOCATED INSIDE APPROVED LIMITS OF DISTURBANCE.

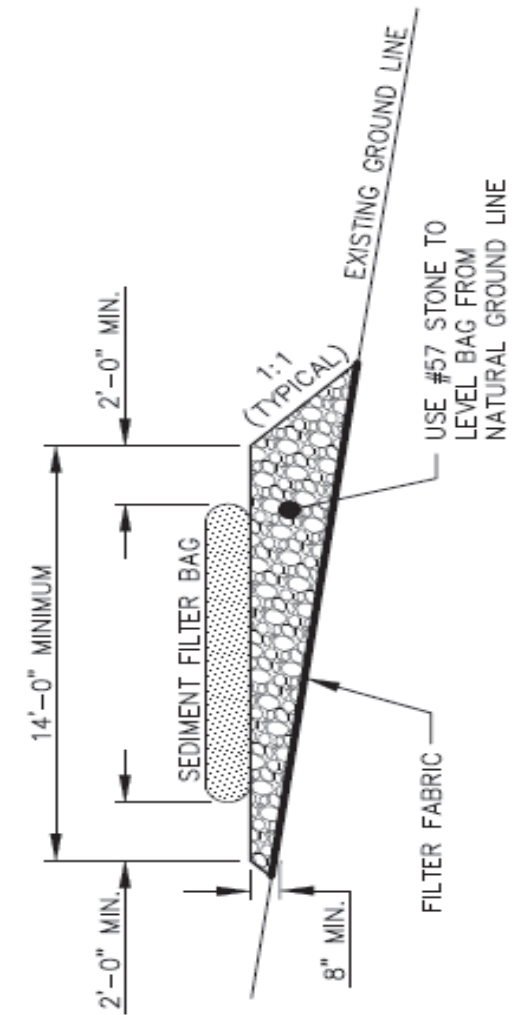

SECTION A-A

SEDIMENT FILTER BAG GENERAL NOTES:

1. CONTRACTOR SHALL EXERCISE CAUTION NOT TO BURST OR DAMAGE THE SEDIMENT FILTER BAG WHEN PUMPING.
2. THE LENGTH AND WIDTH OF THE TEMPORARY SEDIMENT BAG SHOWN ON THIS DRAWING MAY VARY PER VENDOR SPECIFICATIONS. THE MINIMUM "FOOTPRINT" OF THE BAG SHALL BE 10 x 15 FEET.
3. SEDIMENT FILTER BAGS SHALL BE EQUIPPED WITH A SEWN-IN SLEEVE OF SUFFICIENT SIZE TO ACCEPT A MINIMUM 4 INCH DIAMETER PUMP DISCHARGE HOSE. THE DISCHARGE HOSE SHOULD BE EXTENDED INTO THIS SLEEVE A MINIMUM OF 6 INCHES AND BE TIGHTLY SECURED WITH A HOSE CLAMP OR OTHER SUITABLE MEANS TO PREVENT LEAKAGE. HOSE CONNECTION THROUGH A SLIT IN THE BAG WILL NOT BE ACCEPTABLE.
4. THE PUMP DISCHARGE HOSE CONNECTION SLEEVE SHALL BE SECURELY TIED OFF DURING DISPOSAL OF THE SEDIMENT FILTER BAG IN ORDER TO PREVENT LEAKAGE OF COLLECTED SEDIMENTS.
5. SEDIMENT FILTER BAG SHALL BE MAINTAINED AND REPLACED WHEN ONE HALF FULL OF SEDIMENT OR IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.

SILT BAG

DETAIL NUMBER
2018-025A
SHEET 1 of 1